
## Enclosed Square Track Conveyor



- Medium to high capacity enclosed track
- High wearability WebbAlloy II™ Steel
- Bolted and welded install formats
- Industry accepted standard for 50+ years





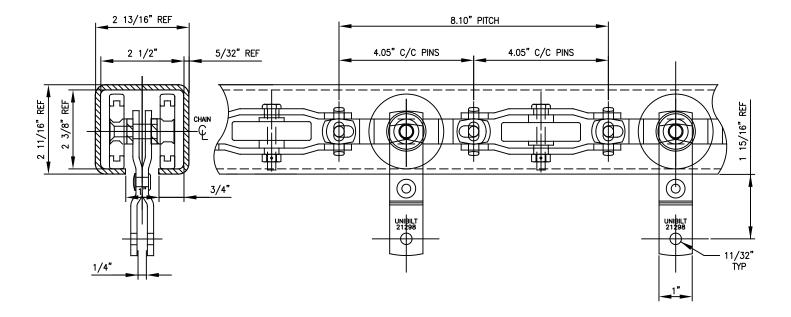





	UNIBILT® Enclosed Square Track
Maximum Load Per Pendant	75 lbs. *
Maximum Drive Pull	750 lbs.
Chain Breaking Load	10,000 lbs.
Nominal Chain Length Per Drive	1,000 ft.
Min. Chain Friction Co-efficient	3.5%
Chain Pendant Pitch	8" minimum
Horizontal Curve Radius	24" (standard), 36", 48"
Vertical Curve Radius	24" (standard), 36"
Maximum Drive Speed	60 FPM
Maximum Incline Angle	90°
Capable of Being Inverted	Yes

<sup>\*</sup> Load per pendant with inclines and declines is 75 lbs. per pendant, monoplane is 125 lbs. per pendant.



1-800-955-8860 sales@pacline.com